


3.8 - Dimensions

Size **535**

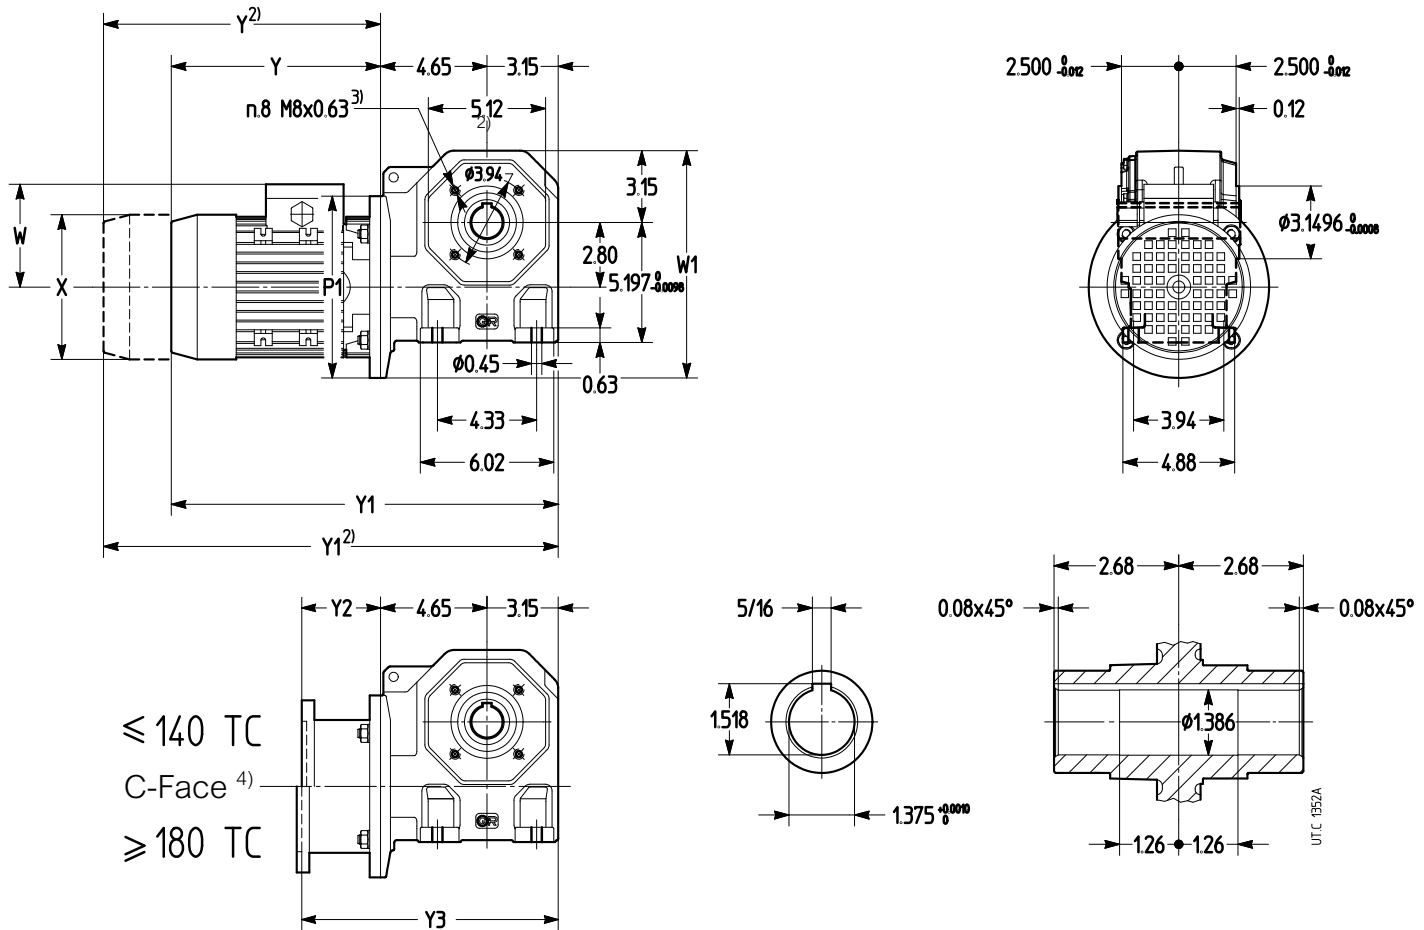

Motor size 1)	P1 Ø	X Ø ≈	Y		Y1		W	W1	NEMA C-Face adapter 4)		
			≈	2)	≈	2)	≈	≈		Y2	Y3
80 B5	200	6.14	9.17	11.89	16.97	19.69	4.76	9.88	MPN 80 B5 - 56 C	2.7	10.5
90 S B5		6.93	11.3	14.41	19.09	22.2	5.55		MPN 90 B5 - 56 C		
L B5									MPN 90 B5 - 140 TC		
LB B5									-		
LC B5									MPN 90 B5 - 180 TC		
100 LA B5R	7.64	13.27	17.01	21.06	24.8	5.94	10.71	MPN 90 B5 - 180 TC	3.35	11.1	
LB B5R								MPN 90 B5 - 180 TC5)			
112 M B5R								8.58			14.25
MC B5R	MPN 100 B5R - 180 TC										

1) Motor mounting position (see ch. 2b).

2) Values valid for HBZ brake motor.

3) No. 4 holes for each of the 2 B14 output flanges.

4) Available on request: for further dimensions and details see ch. 4.

5) Not available for 100LB 6 motor.

6) Not available for 112M 4 motor.